# DIGITAL PA AMPLIFIER A-2030DD-EB 1CE

## ■DESCRIPTION


The A-2030DD-EB is a high cost-performance mixer power amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

## ■SPECIFICATIONS

* 0 dB = 1 V

| | |
|---|---|
| Power Source | 220 – 240 V~ 50/60Hz |
| Rated Output | 30 W |
| Power Consumption (EN60065) | 12 W (AC operation at 1/8 maximum output without clip) |
| Frequency Response | 50 – 20,000 Hz, ±3dB |
| Distortion | Under 1% at 1 kHz, 1/3 rated power |
| Input | MIC 1: –60 dB*, 600Ω, balanced, Equivalent to 5P Din Type<br>MIC 2 – 3: –60 dB*, 600Ω, balanced, phone jack<br>AUX 1 – 2: –20 dB*, 10 kΩ, unbalanced, RCA pin jack |
| Output | Specker out: Balanced (floating)<br>High impedance: 330Ω, (100 V)<br>Rec out: 0 dB*, 600Ω, unbalanced, RCA pin jack |
| Phantom Power | DC +21 V (MIC 1) |
| S/N Ratio | Over 60 dB |
| Tone Control | Bass: ±10 dB at 100 Hz<br>Treble: ±10 dB at 10 kHz |
| Muting | MIC 1: Mutes other input signals by 0 –30 dB attenuation |
| Indicator | Power LED, Signal LED, Peak LED |
| Finish | Panel: ABS resin, black<br>Case: Steel plate, black |
| Dimensions | 420 (W) X 100.6 (H) X 280.3 (D) mm (16.54" X 3.96" X 11.04") |
| Weight | 4.0 kg (8.88 lb) |

## ■APPEARANCE

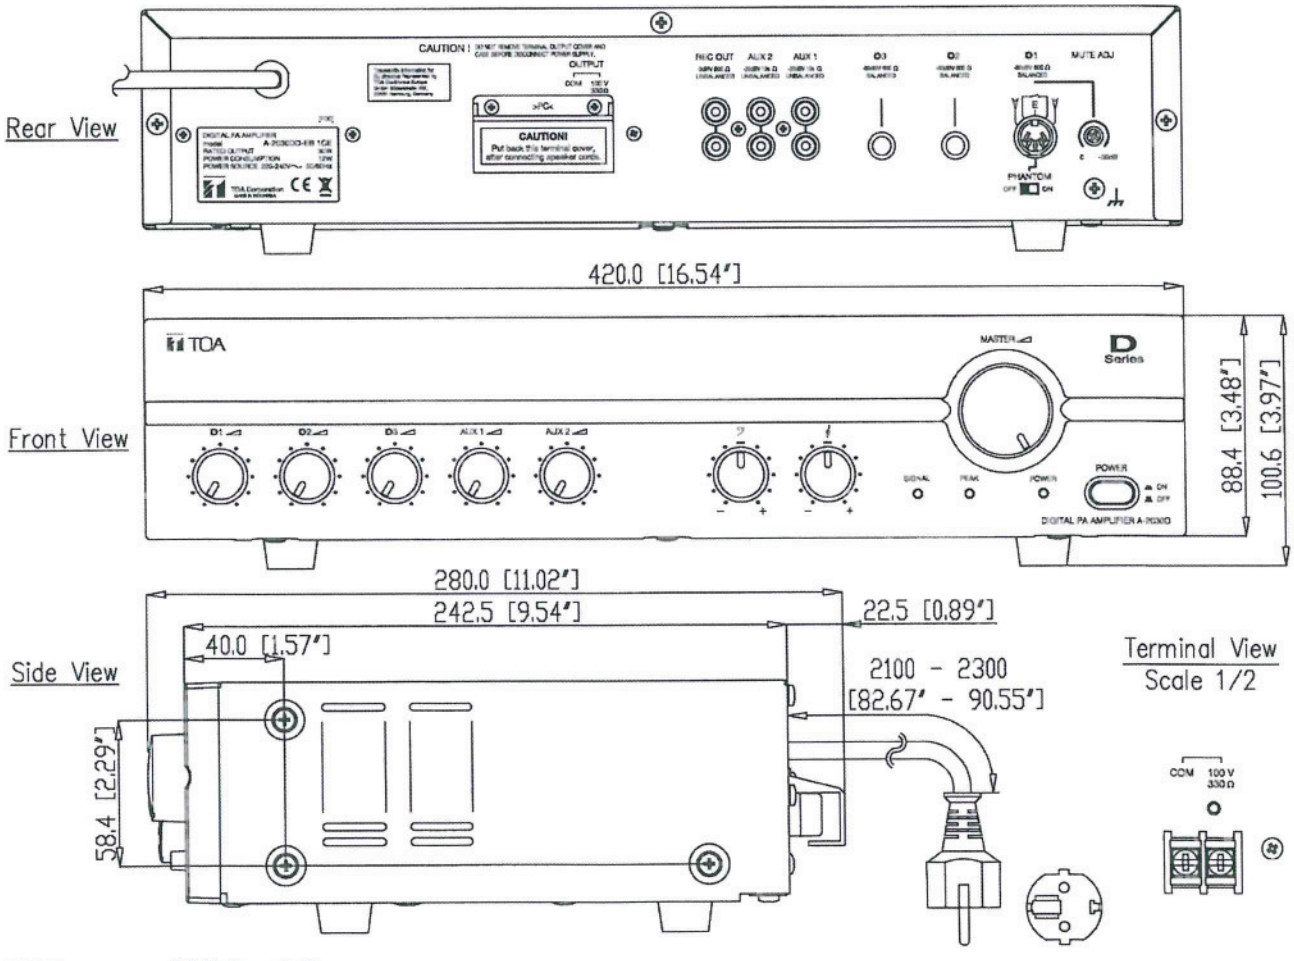


UNIT : mm SCALE : 1/3