TOA

SPLASH-PROOF MEGAPHONE (WITH WHISTLE SIGNAL)

ER-1206W

■DESCRIPTION

The ER-1206W is a compact splash-proof megaphone rated at 6 W output featuring a built-in whistle. It features IPX5 water-jet-resistant designs. A whistle tone can be used for attracting attention. It operates with 6 R6P batteries, or 4 R6P batteries when the battery spacer (accessory) is used. Handle and microphone with anti-bacteria treatment improve hygiene and safety during use.


■SPECIFICATIONS

Power Source	R6P (AA) × 6 (9 V DC) or R6P (AA) × 4 (6 V DC)
Rated Output	6 W
Maximum Output	10 W
Battery Life	When using six R6P batteries (JEITA)* Voice: Approx. 8 hours, Whistle: Approx. 20 minutes When using four R6P batteries (JEITA)* Voice: Approx. 5 hours, Whistle: Approx. 10 minutes
Audible Range	Voice: Approx. 250 m (JEITA)*, Whistle: Approx. 315 m (JEITA)*
Signal Sound	Whistle
Frequency Response	450 – 6,000 Hz (SPL –20 dB)
Magnetic Circuit	Neodymium magnet, inner magnet type
Diaphragm	Polyimide film (voice coil, bobbin)
Anti-bacteria Treatment	Mouth and handle
Water Protection	IPX5
Operating Temperature	–10°C to +40°C
Finish	Horn: ASA resin, clear dark gray Other: ASA resin, yellow Strap: Nylon, black
Dimensions	154 (W) × 266 (H) × 250 (D) mm
Weight	680 g (without batteries)
Accessory	Battery spacer ···1
Option	Wall mounting bracket for megaphone: SP-1100

Note: Batteries are optional.

* JEITA: Japan electronics and information technology industries association. (EIAJ TT-4501A)

■APPEARANCE

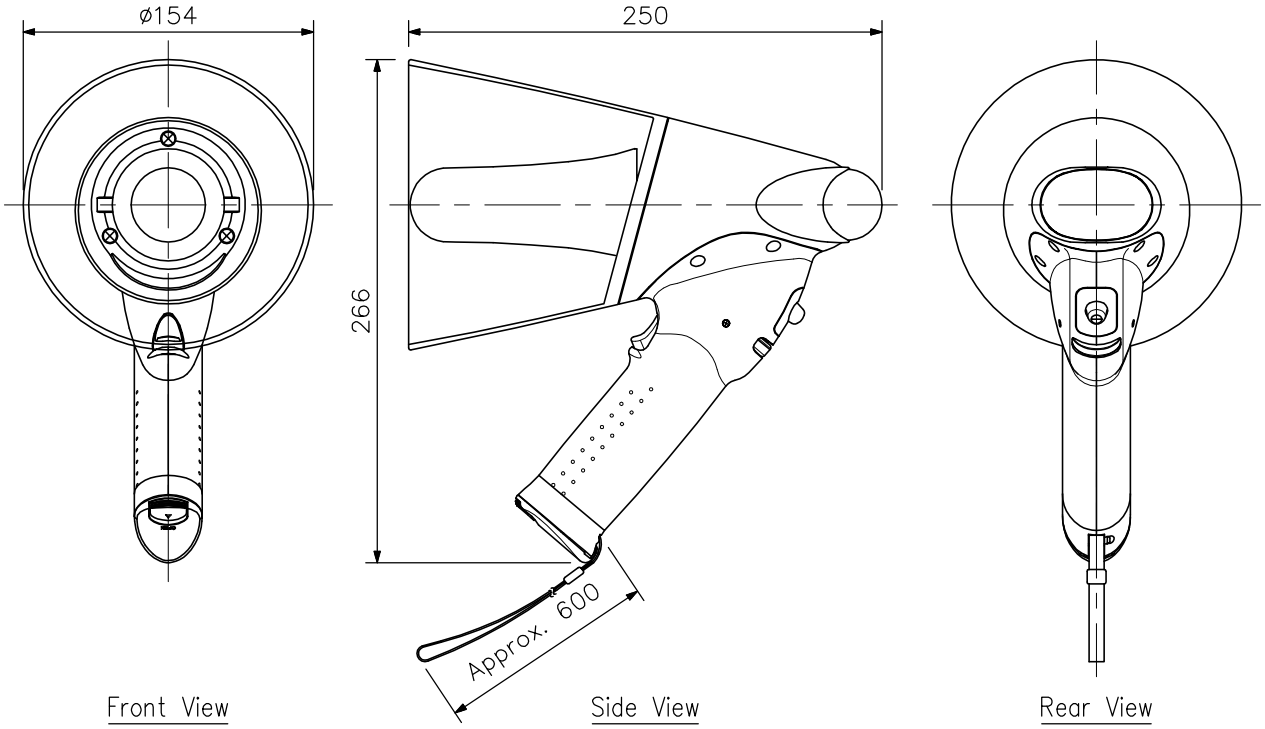

Front View　　Side View　　Rear View

<Note on the audible range and battery life>

1. The indications of the audible range and battery life are based on the JEITA Standard*.
2. Audible Range presumes that the megaphone employs new batteries and is used on a quiet street.
   It varies depending on such conditions as battery consumption, ambient noise, wind direction and obstacles.
3. Battery Life assumes that megaphone is used for 30 minutes a day.

UNIT: mm　SCALE: 1/4

TOA Corporation

DWG No: GER016A1