TOA

SPEAKER SYSTEM

HS-1500BT


■DESCRIPTION

The HS-1500BT is a 2-way speaker system made of resin, and features a large diameter woofer. It can be installed and used in many different applications with combined use of the supplied accessories and/or the optional mounting brackets.

■SPECIFICATIONS

Enclosure	Sealed type
Rated Input	60 W (High Impedance)
Power Handling Capacity	Continuous pink noise: 100 W (Low Impedance) Continuous program: 300 W (Low Impedance)
Rated Impedance	8 Ω 100 V line: 170 Ω (60 W), 330 Ω (30 W), 670 Ω (15 W) 70 V line: 83 Ω (60 W), 170 Ω (30 W), 330 Ω (15 W), 670 Ω (7.5 W)
Sensitivity	98 dB (1 W, 1 m)
Frequency Response	60 – 20,000 Hz
Crossover Frequency	3 kHz
Directivity Angle	Horizontal: 90°, Vertical: 40°
Speaker Component	Low frequency: 38 cm (15") cone-type, High frequency: Balanced dome tweeter × 6
Input Terminal	NEUTRIK NL4MP Speakon and M4 screw terminal, distance between barriers: 9 mm (0.35")
Operating Temperature	−10°C to +50°C (14°F to 122°F)
Finish	Enclosure: Polypropylene, black Punched net: Surface-treated steel plate, black
Dimensions	451 (W) × 560 (H) × 400 (D) mm (17.76" × 22.05" × 15.75")
Weight	14 kg (30.86 lb)
Accessory	Handle ···1, Handle fitting bracket ···2, Handle mounting screw ···2, Rubber foot ···2, Rubber foot mounting screw ···2
Option	Mounting bracket: HY-1500VB (for vertical speaker mounting) HY-1500HB (for horizontal speaker mounting) Ceiling mount bracket: HY-C0801 Wall mount bracket: HY-W0801 Speaker stand: ST-33B

■APPEARANCE

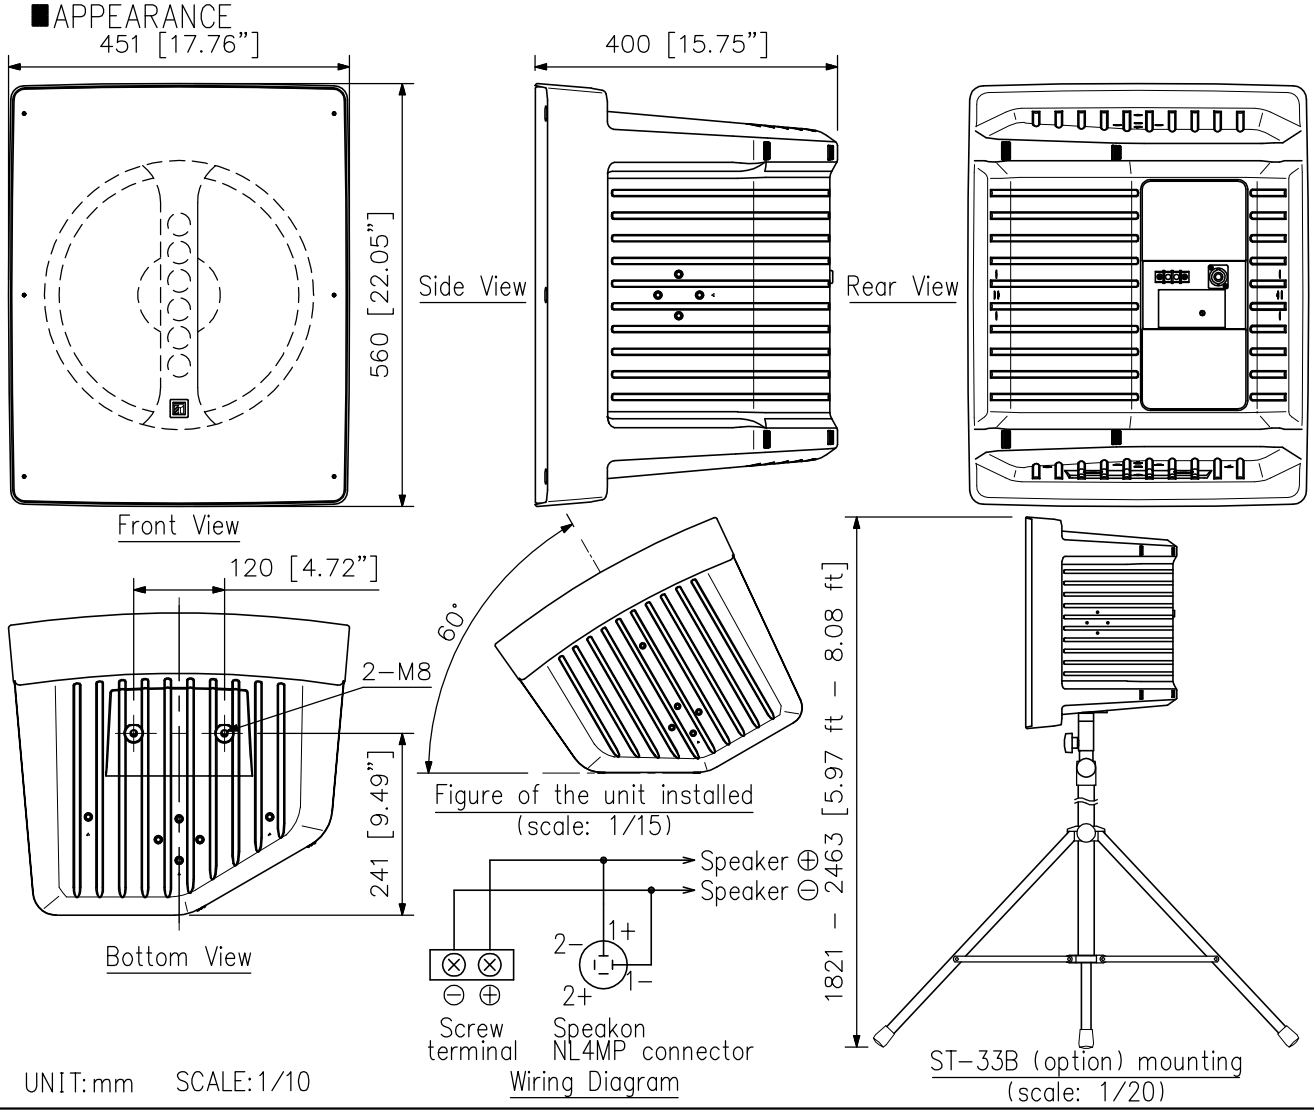

UNIT: mm SCALE: 1/10