REMOTE AUDIO CONTROL PANEL WITH AUDIO OUT

M-802RC-EB


■DESCRIPTION

Designed for exclusive use with the M-8080D, the M-802RC Remote Audio Control Panel With Audio Out having a volume/routing control knob, in addition to two audio output.


■SPECIFICATIONS

Power Source	24V DC (Powered by M-8080D or M-804EX)
Audio Output	Line output 1 – 2 : 0 dBV, 1.8kΩ, Maximum output 20dBu (7.75V) , electronic balanced, screw terminal (3 pins x 2)
RD IN	Transmits and receives AES3 digital audio plus control data Connect to M-8080D or M-804EX, RJ45 Connector
Frequency Response	20 – 20,000 Hz, ±3 dB
Total Harmonic Distortion	0.01%
S/N Ratio	Over 105dB (A weighted)
Crosstalk	Over 79dB (A weighted)
Control	Volume / routing
Display	LCD Display Displays device information : ID, Volume, communication status
Operating Temperature	0°C to +40°C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Panel: Polycarbonate + ABS, white (RAL9016 or equivalent)
Dimensions	147 (W) X 86 (H) X 65 (D) mm (5.79" X 3.39" X 2.56")
Weight	0.3 kg
Accessory	Front cover ···1, Wall mounting screw (4 x 30) ···4, Plastic anchor ···4


■APPEARANCE

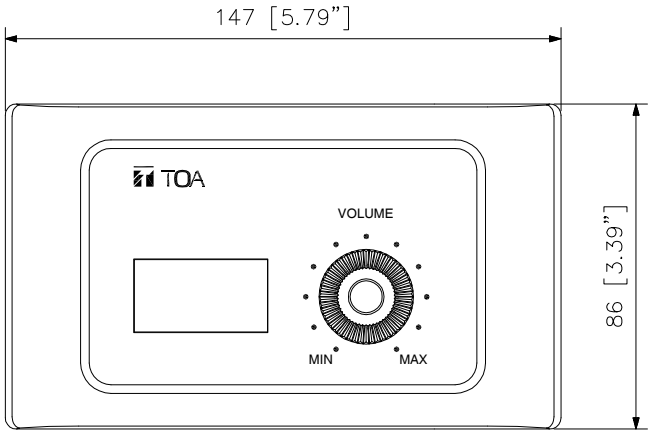

Front View

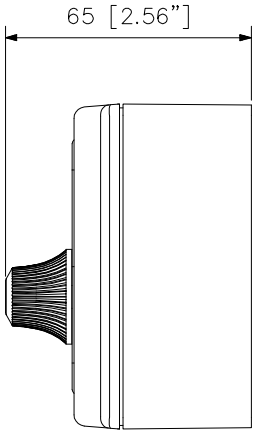

Side View

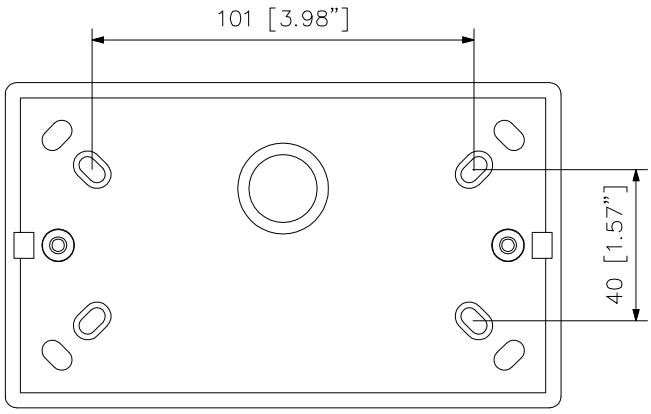

Rear View

UNIT: mm SCALE: 1/2