PC-2360

Der Deckenlautsprecher PC-2360 ist geeignet für Durchsagen und Hintergrundmusik in hoher Klangqualität. Das Lautsprecherdesign harmoniert mit moderner Architektur und Einrichtung.



Artikelnummer (SAP)PC-2360

Specifications

Frequenzbereich (combined)	60 Hz - 20 kHz
Anschluss	Push wire connection (Bridging terminal - 2 branch type)
Kennschalldruckpegel (1₩V, 1 m) (combined)	94 dB SPL (dB SPL)
Lautsprecher	16 cm cone-type
Leistungsanpassung	6/3/1,5/0,8 W (100V)3/1,5/0,8/0,4 W (70V)
Ausführung	verkehrsweiß (RAL 9016 oder ähnlich)
Betriebstemperatur	-10 °C to +50 °C

We supply sound, not equipment.
www.toa.eu

©TOA Electronics Europe GmbH | Data subject to change without notice.
DE, 2019/08/20

PC-2360

Appearance

TOA CEILING MOUNT SPEAKER 6INCH 6W PC-2360


■DESCRIPTION


The PC-2360 Ceiling Mount Speaker is of all metallic construction and ideal for use in a voice alarm system or BGM system. It feature spring clamp mechanism for easy mounting to the ceiling. The input impedance can be easily changed by changing the tap position of the transformer. The push-in type input terminal block makes cable connection easy and allow bridge wiring.

■SPECIFICATIONS


Rated Input	6 W (100 V line), 3 W (70 V line)
Rated Impedance	100 V line: 1.7 kΩ (6 W), 3.3 kΩ (3 W), 6.7 kΩ (1.5 W), 13 kΩ (0.8 W) 70 V line: 1.7 kΩ (3 W), 3.3 kΩ (1.5 W), 6.7 kΩ (0.8 W), 13 kΩ (0.4 W)
Sensitivity	94 dB (1 W, 1 m) (500 Hz – 5 kHz, pink noise)
Frequency Response	60 Hz – 20 kHz (peak –20 dB)
Speaker Component	16 cm (6") cone-type
Operating Temperature	–10 °C to +50 °C (14 °F to 122 °F)
Dimensions for Fixing Hole	Mounting hole: ø200±3 mm (7.87"±0.12") Ceiling thickness: 5 – 25 mm (0.2" – 0.98")
Speaker Mounting Method	Spring clamp
Applicable Cable	Solid wire: 0.5 – 3 mm² (AWG 20 – 12)
Connection	Push wire connection (Bridging terminal-2 branch type)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint
Dimensions	ø230 × 76 (D) mm (9.06" × 2.99")
Weight	740 g (1.63 lb)
Accessory	Paper pattern ···1


■APPEARANCE

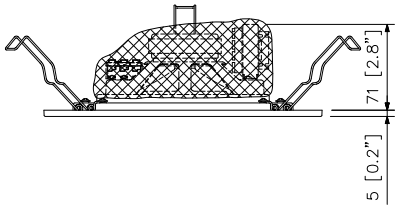

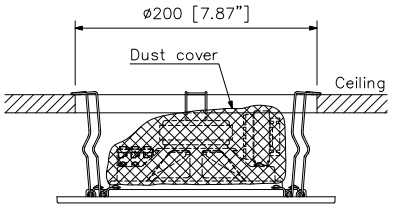

Mounting Diagram

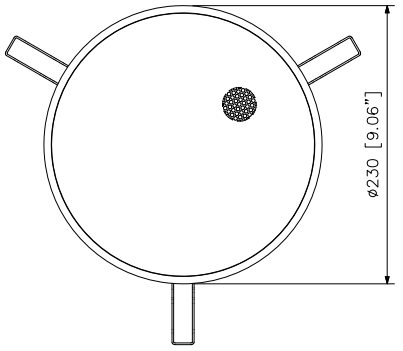

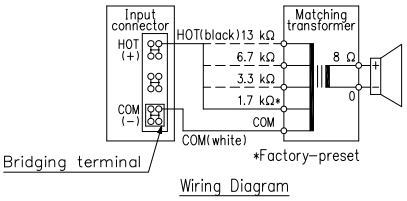

Wiring Diagram

Note: Use transformer terminals when changing input impedance.

UNIT: mm SCALE: 1/4

19E TOA Corporation DWG No: GPC03AA1

©TOA Electronics Europe GmbH | Data subject to change without notice.
DE, 2019/08/20