IP INTERCOM SWITCH BOARD RS-142


■DESCRIPTION

The RS-142 is a switch board designed for use with the N-8000RS or N-8010RS 2-Core Shielded Substation Interface Unit.
You can make desired switch panels to meet intended purposes by combining the RS-142 with the separately prepared operation panel having 2 switches to be used as call buttons.
Also, it can be used in connection with the RS-141 Ip Intercom Option Handset.

■SPECIFICATIONS

Call Button Wiring	4 cables (for 2 momentary switches)
Wiring	Two-core shielded cable
Transmission Range	0.5 km (546 yd)/ø0.5 mm (AWG24) 0.8 km (874 yd)/ø0.65 mm (AWG22) 1.3 km (1421 yd)/ø0.9 mm (AWG19)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Weight	30 g (0.07 lb)

■APPEARANCE

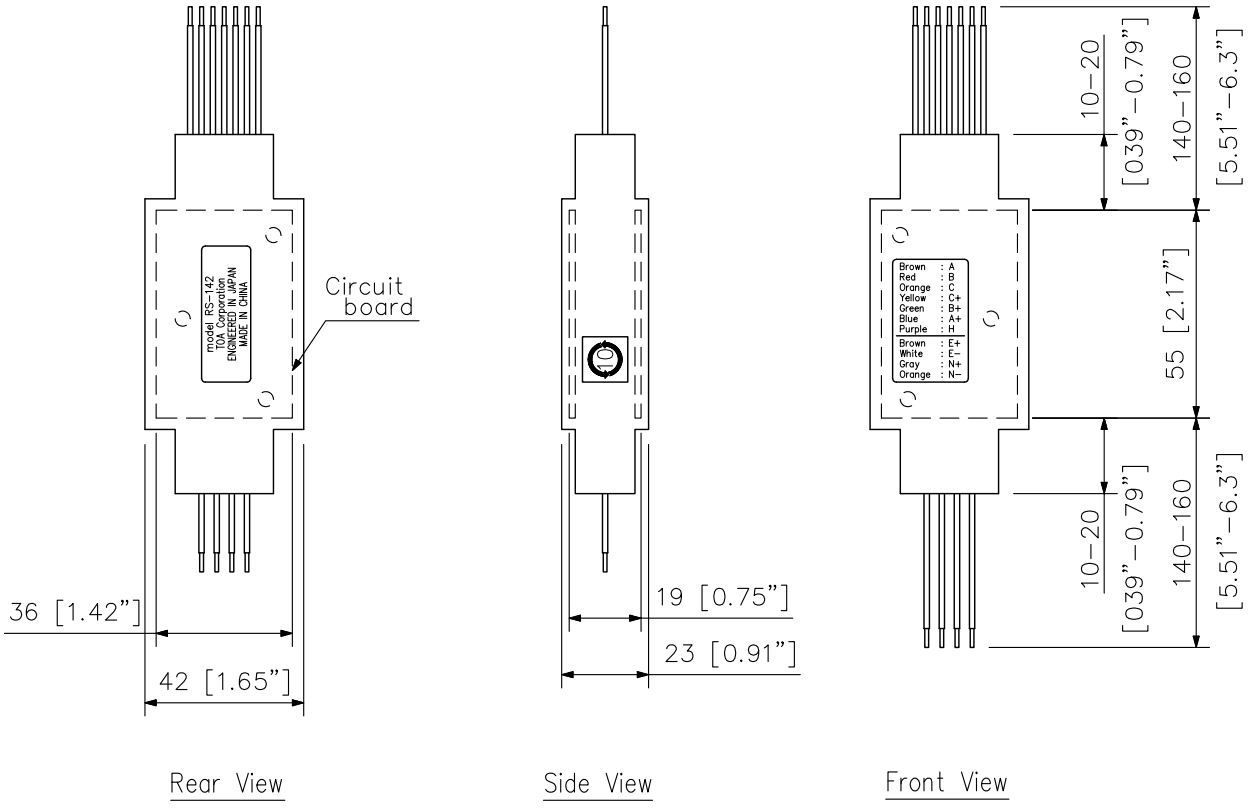

Rear View Side View Front View

UNIT: mm SCALE: 1/2

TOA Corporation

DWG No: GRS00MA1-1