# SUBSTATION (INDOOR TYPE) RS-150

## ■DESCRIPTION

The RS-150 can call and converse with the registered master stations.
It utilizes a 2-core shielded cable.


## ■SPECIFICATIONS

| | |
|---|---|
| Rated Input | 1 W |
| Rated Impedance | 625 Ω (1 W/25 V) |
| Internal Speaker | 4 cm cone-type |
| Operating Temperature | −10 °C to +50 °C<br>(Temperature range not to freeze the speaker and switch) |
| Finish | Panel: Stainless steel, hairline<br>Call button: Resin |
| Dimensions | 120 (W) × 120 (H) × 48.5 (D) mm |
| Weight | 410 g |
| Accessory | Box mounting screw (No.6-32UNC × 18) ·····4,<br>Box mounting screw (M4 × 25) ·····4 |

Maximum cable distance

| Cable Type | AWG24 (ø0.52 mm) | AWG22 (ø0.65 mm) | AWG20 (ø0.82 mm) |
|---|---|---|---|
| Distance | 0.5 km | 0.8 km | 1.3 km |

## ■APPEARANCE

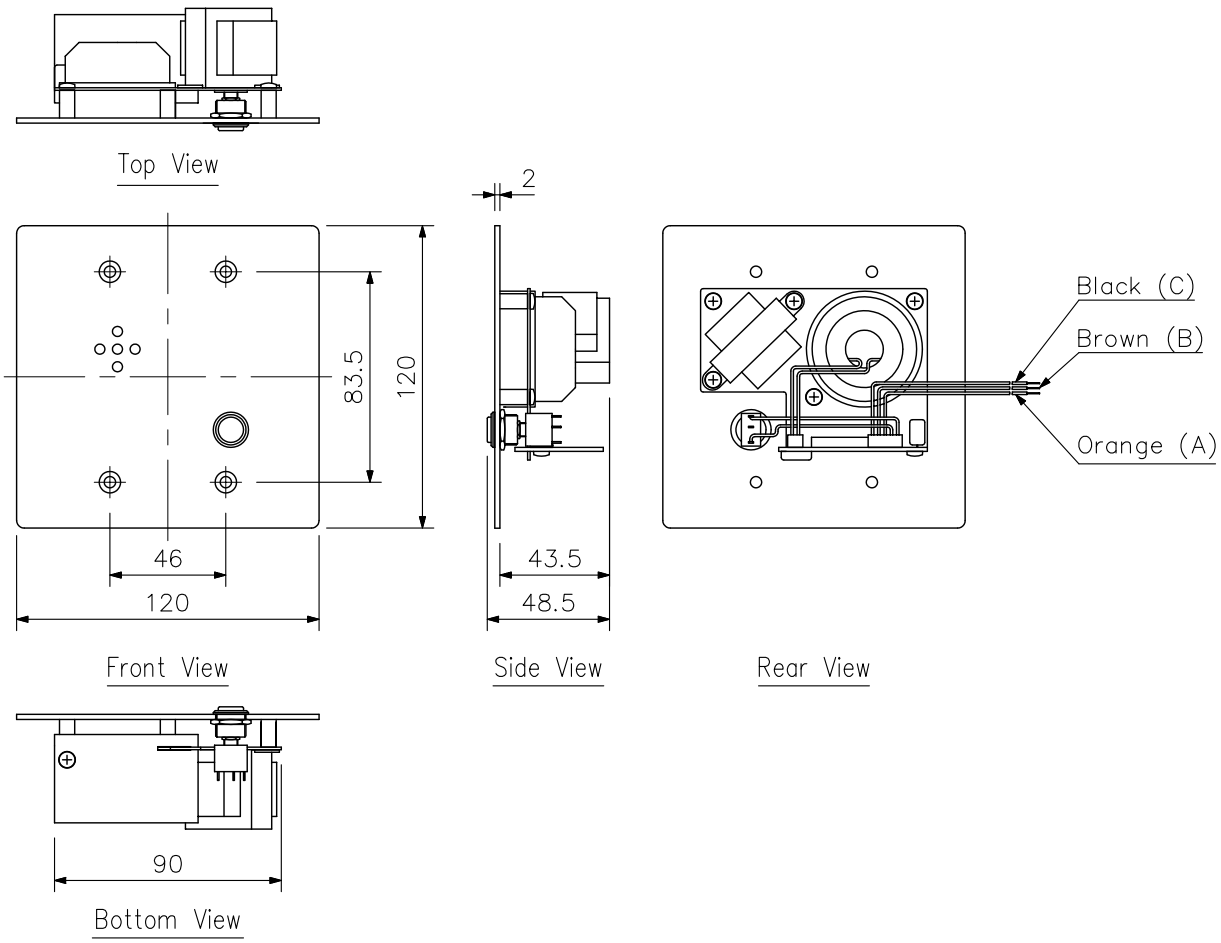


UNIT: mm SCALE: 1/3