TOA

LINE ARRAY SPEAKER

SR-H3L


■DESCRIPTION

The SR-H3L Line Array Speaker forms a linear sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching Transformer.

■SPECIFICATIONS

Enclosure	Bass-reflex type
Power Handling Capacity	Continuous program: 360 W
Rated Impedance	8 Ω
Sensitivity	95 dB (1 W, 1 m equivalent, measured at 8 m)
Frequency Response	110 – 18,000 Hz (when using an optional digital processor)
Directivity Angle	Horizontal: 90° Vertical: 0° (within the range of speaker height)
Speaker Component	7 cm (2.8") cone-type × 16
Input Connector	Removable input connector
Finish	Enclosure: MDF, white, urethane paint Front grille: Punched steel plate, white, acrylic paint
Dimensions	84 (W) × 1186.4 (H) × 115 (D) mm (3.31" × 46.71" × 4.53")
Weight	7.6 kg (16.75 lb)
Option	Matching transformer: MT-S0301 Extension plate: SR-EP3 Wall mounting bracket: SR-WB3 Wall tilt bracket: SR-TB3 Flying bracket: SR-FB3 Stand adapter: SR-SA3 (Applicable stand: ST-33B) Digital processor: DP-0206

■APPEARANCE

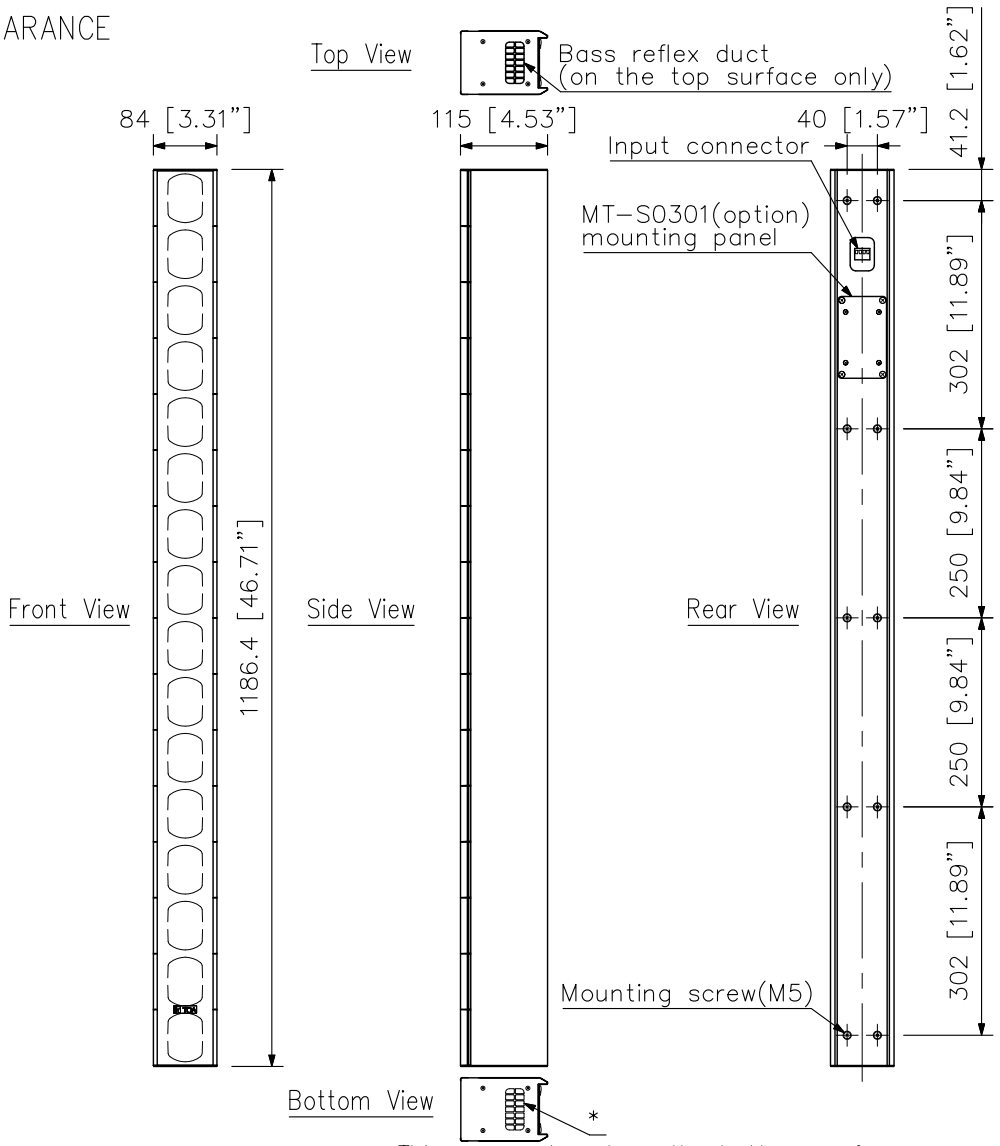

* This recessed part on the bottom surface does not function as a bass reflex duct.

UNIT: mm SCALE: 1/10