TOA

DRIVER UNIT 30W

TU-631

■DESCRIPTION


The TU-631 is a highly intelligible driver unit suited to public address announcement applications. Use the driver unit in combination with a suitable horn (optional).
Its powder-coated finish and stainless steel screws ensure the unit's weatherproof capability.

■SPECIFICATIONS


Applicable Horns	TH-650, TH-660, TH-100* and TH-200*
Rated Input	30 W
Rated Impedance	16 Ω
Sensitivity	110 dB (1 W, 1 m) (When operated with JIS C 5504 standard horn.)
Frequency Response	150 – 6,000 Hz (When operated with JIS C 5504 standard horn.)
IP Code	IP 65 (When a driver is operated with a horn.)
Horn Coupling	1 – 3/8 18 threads (inch screw)
Polarity	Hot: Black, Com: White
Operating Temperature	−20°C to +60°C (−4°F to 140°F) (must be free from dew condensation)
Finish	Flange: Aluminum, gray, powder coating Rear cover: ABS resin, gray Screws: Stainless steel Speaker cable: Polyvinyl chloride insulated cabtyre cable (6 mm (0.24") in diameter, 600 mm (23.62") in length)
Dimensions	ø139 × 106 (D) mm (ø5.47" × 4.17")
Weight	1.4 kg (3.09 lb)
Option	Driver unit cover: UC-200A Matching Transformer: MT-30T, MT-60T

Note (*)
Speaker cable connection
Remove connectors of cables from the TH-100's or TH-200's cover, and connect the driver's speaker cables to the horn cables of the same color.

■APPEARANCE

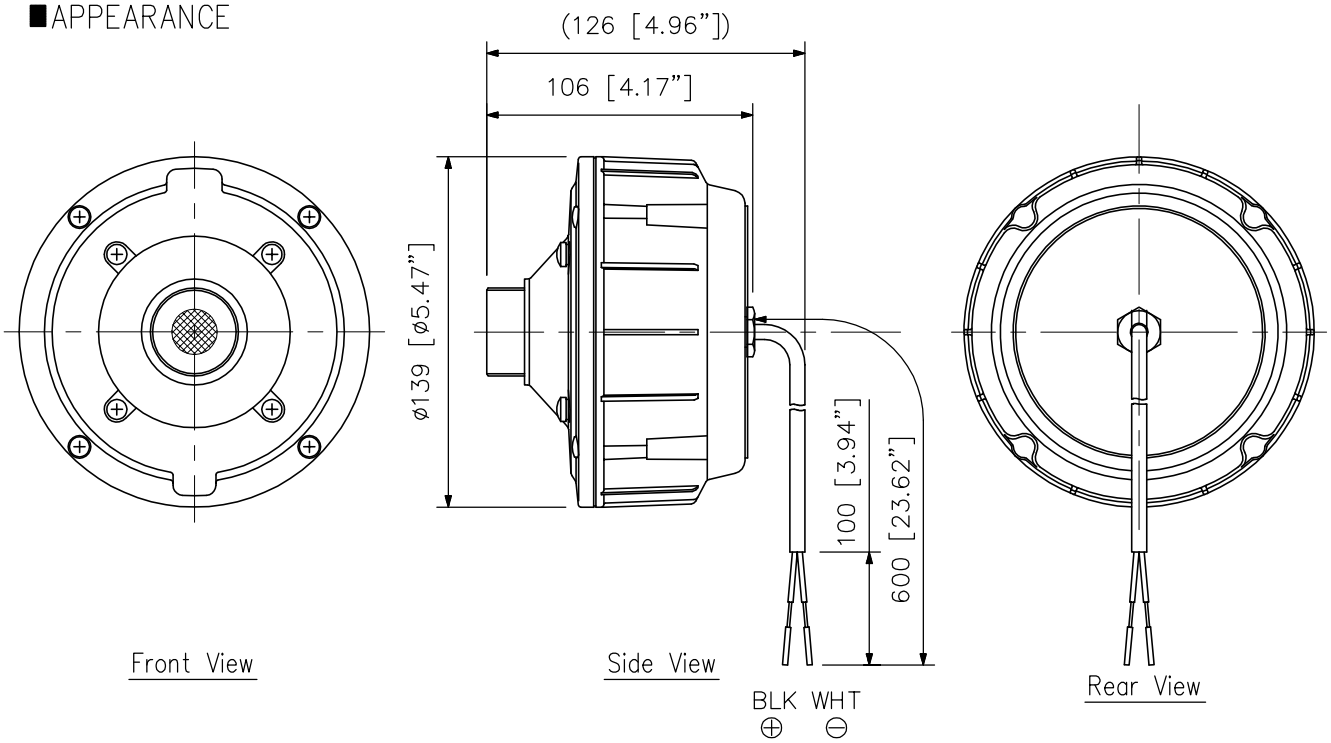

Front View　　Side View　　Rear View



Wiring diagram

UNIT: mm　SCALE: 1/3

TOA Corporation

DWG No: GTU00LA1