TOA

DYNAMIC MICROPHONE

DM-524S


■DESCRIPTION

A unidirectional microphone with a gooseneck shaft.
Use this microphone in conjunction with the ST-73A desk-top stand (option).

■SPECIFICATIONS

Type	Moving coil microphone
Polar Pattern	Cardioid pattern
Rated Impedance	600 Ω, balanced
Rated Sensitivity	-56 dB (1 kHz, 0 dB=1 V/Pa)
Frequency Range	100 - 10,000Hz
Switch	Slide/short-off type
Output Connector	ø21, 3-pin plug (BTS21P3B)
Finish	Microphone body: Gold, sparkling paint Gooseneck shaft: Nickel-pear skin-plating
Weight	475g
Usable Stand	ST-73A (option) or ø21 mm 3-pin socket
Accessories	ø21 3-pin receptacle (BTS21R3A)·····1, M3×10 screw·····3, W3 washer·····3, SW3 spling washer·····3, M3 nut·····3

■APPEARANCE

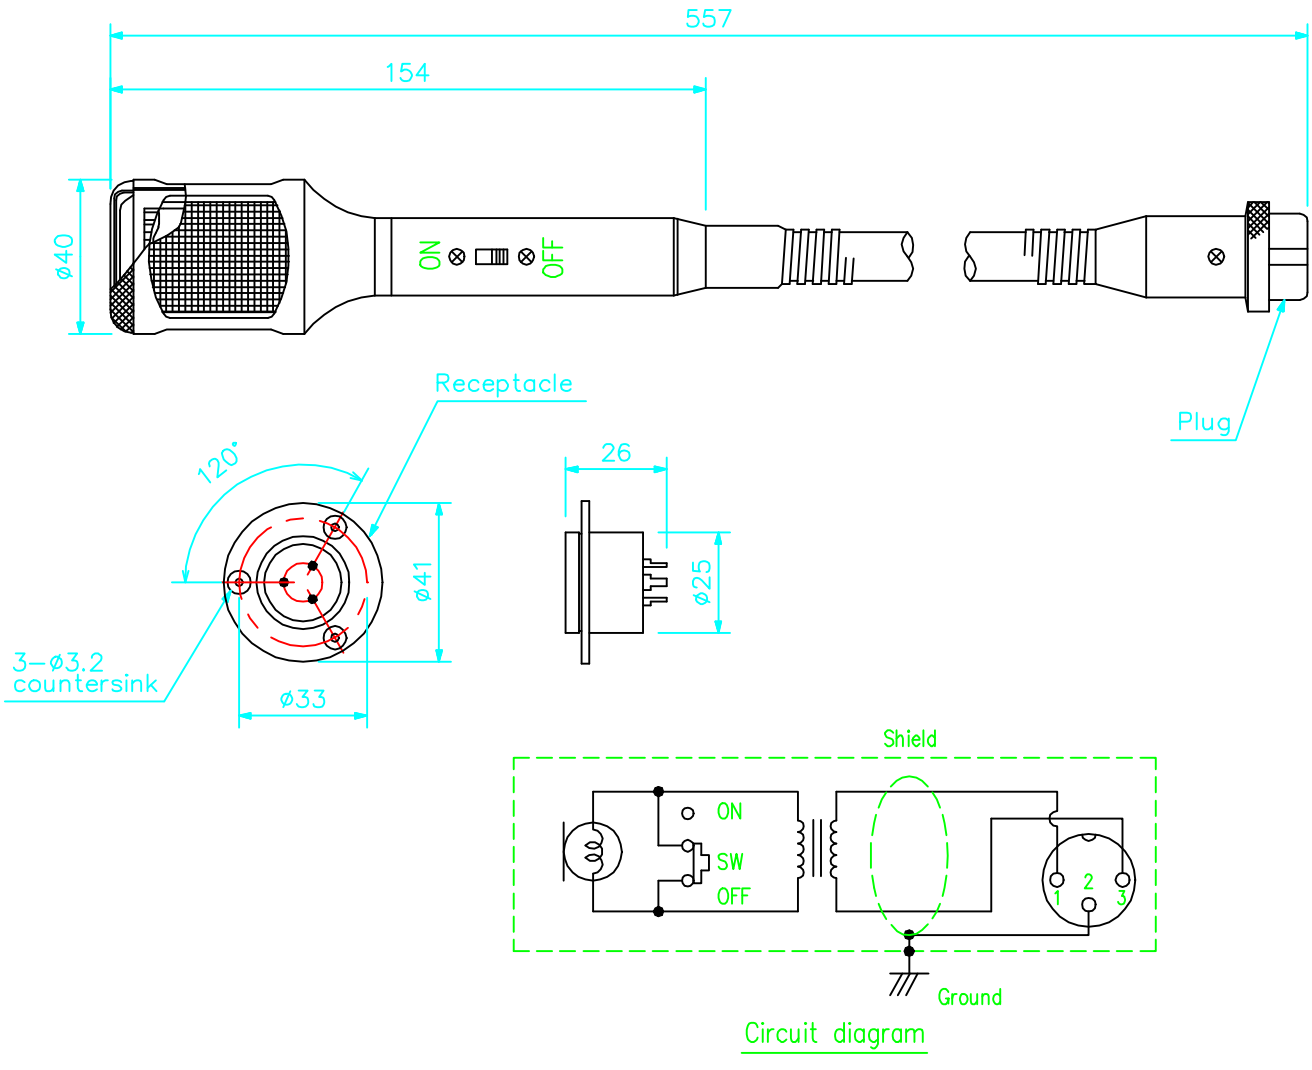

Circuit diagram

UNIT: mm SCALE: 1/2