TOA

SPEAKER SELECTOR

SS-9001


■DESCRIPTION

The SS-9001 is a speaker selector used with the ZP-001T zone paging module.
It outputs 2 input signals to 4 different zones.

■SPECIFICATIONS

Power Source	Supplied from the optional AD-246 AC adapter or an external 24 V DC/200 mA power supply.
Current Consumption	120 mA
Control Signal	No-voltage make contact input (polarized), open voltage: 24 V DC, short-circuit current: 3 mA
Control Power	Under 240 W (70 V line)
Speaker Terminal	Removable terminal block (2 pins)
Control Terminal	Removable terminal block (10 pins)
Operating Temperature	−10°C to +40°C
Finish	Case: Surface-treated steel plate
Dimensions	112 (W) × 197 (H) × 30 (D) mm
Weight	530 g
Accessory	Removable terminal plug (2 pins) ···6, Removable terminal plug (10 pins) ···1, Cord clamp ···1, Mounting screw ···4
Option	AC adapter: AD-246

■APPEARANCE

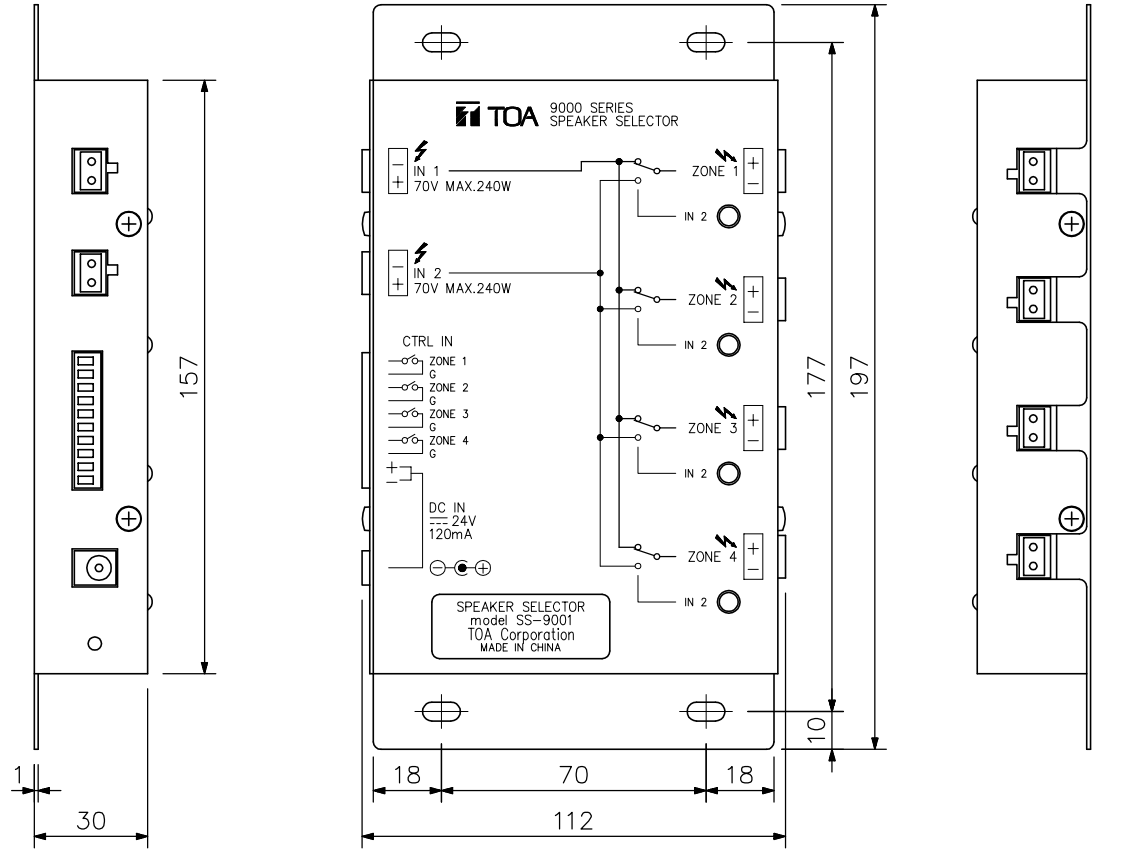

Left Side View　　Front View　　Right Side View

UNIT: mm　SCALE: 1/2

TOA Corporation

DWG No: GSS00EA1