
Loudspeakers

Sub 15

High-power sub-bass loudspeaker

Optimal Audio



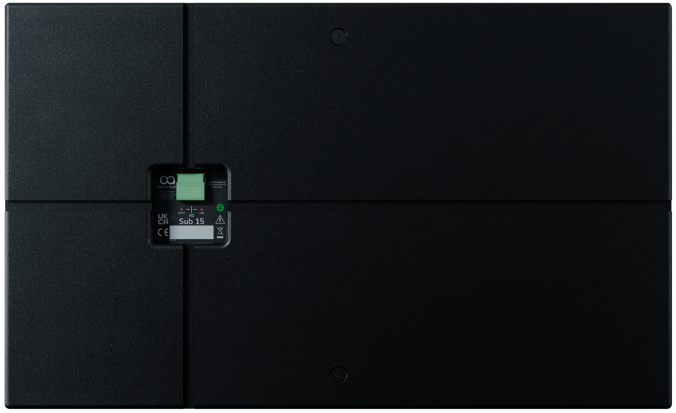

FEATURES

- Compact size
- Powerful sub-bass support down to 40Hz (-10dB)
- High power handling

Sub 15 is a compact, high-performance, passive, 15” subwoofer designed for applications that call for increased impact and low frequency performance across the Optimal Audio loudspeaker range.

The 15” (380mm) driver is loaded into a plywood bass-reflex cabinet that maximises performance, with a peak SPL of 135dB, while taking up minimal space. Sub 15 can be used on the ground or flown using integral M8 inserts.

An impact-resistant perforated steel grille protects the driver, and rubber feet on the base resist movement. The Sub 15 enclosure is constructed from plywood and finished in black textured paint.

APPLICATIONS

Cafes

Bars/ Restaurants

Wedding Venues

Hotels

Education Facilities

Houses of Worship


Fitness Studios

Loudspeakers

Sub 15

High-power sub-bass loudspeaker

Optimal Audio

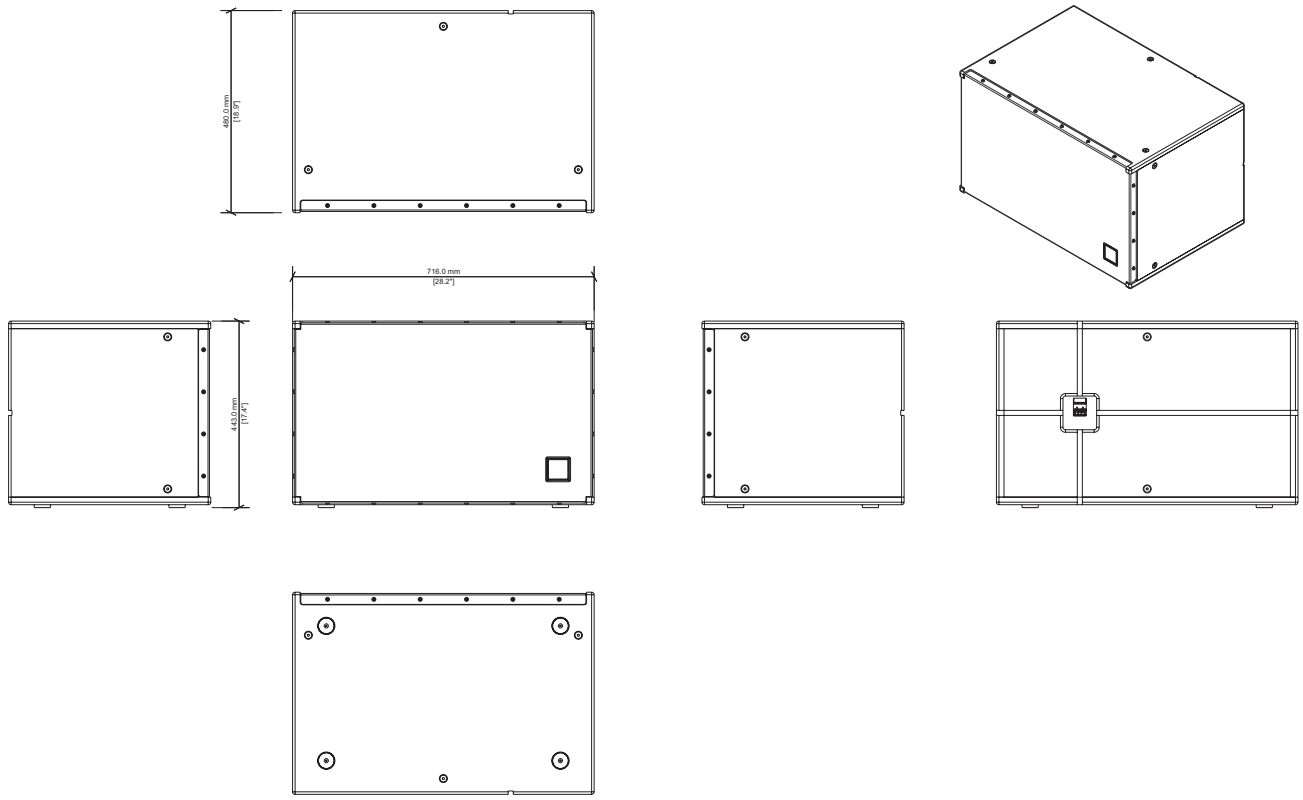

SPECIFICATIONS

TYPE	Sub-bass loudspeaker
FREQUENCY RESPONSE (with preset)	45Hz - 150Hz ± 3dB -10dB @ 40Hz
DRIVERS	LF: 15" (380mm),
RATED POWER (AES)	500W
NOMINAL IMPEDANCE	8 Ohms
SENSITIVITY (1W/1m)	102dB
MAXIMUM SPL	129dB (cont), 135dB (peak)
ENCLOSURE	Plywood
FINISH	Black paint
PROTECTIVE GRILLE	Yes
CONNECTORS	Euroblock type
PIN CONNECTIONS (INPUT)	1+ 1-
FITTINGS	12 x M8, Inset bolts
DIMENSIONS	(W) 716mm x (H) 443mm x (D) 480mm (W) 28.19" x (H) 17.4" x (D) 18.9"
WEIGHT	34.3Kg (75.6lbs)
ACCESSORIES (available separately)	M8 Eye Bolt

Black

Textured
Paint Finish

34.3 kg 75.6 lbs

Weight

optimal-audio.co.uk

© 2021. Optimal Audio Group Ltd.