TOA

COLUMN SPEAKER TZ-30-EB


■ DESCRIPTION

The Metal column speaker TZ-30-EB is highly efficient compact speaker that deliver excellent sound performance in medium sized venues such as houses of worship, gymnasiums, auditoriums and more. The weatherproof range of TZ-30-EB metal column speaker has attained a rating of IP-55. They are capable of withstanding weather conditions in outdoor installations.


■ SPECIFICATIONS

Rated Input	30W
Rated Impedance	100V line：333Ω（30W），667Ω（15W），1.3kΩ（7.5W） 8Ω line：8Ω（30W）
Sensitivity	90dB(1W,1m)
Frequency Response	150-20kHz (-20dB)
Speaker Component	5.3cm（2”）×4pcs cone-type, 5.1cm（2”）×1pcs cone-type
Dust/Water Protection	IP55
Applicable Cable	Solid copper wire：∅0.8-∅1.6mm（equivalent to AWG 20-14） 7-core twisted copper wire：0.75-1.25mm²（equivalent to AWG 18-16）
Connection	Screw terminal
Operating Temperature	-20°C to +55°C(-4°F to 131°F)
Finish	Enclosure: Aluminum,White(RAL9016 or equivalent) Front grille: Aluminum net,White(RAL9016 or equivalent)
Dimensions	403(H)×74.5(W)×69(D)mm(15.87"×2.93"×2.72")
Weight	1.74kg(3.84lb)
Accessory	Cable Grand×2　Rubber washer×2　Hexagon wrench×1 Rubber gasket×2　L-type bracket×2　Bracket mounting screw×2

■ APPEARANCE

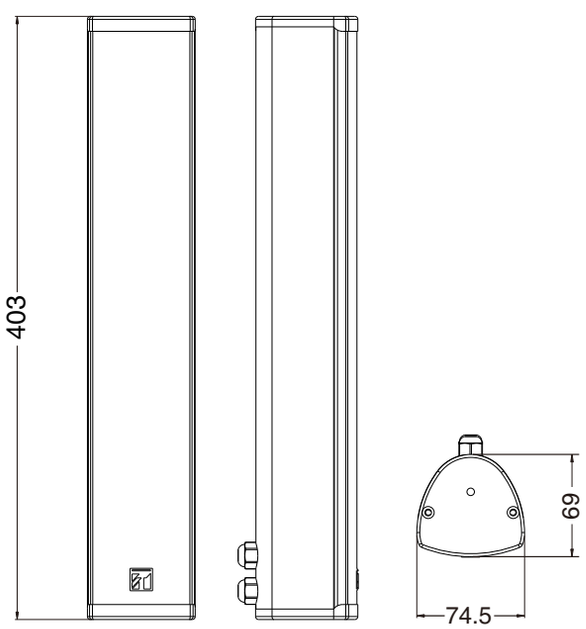

UNIT：mm　SCALE:1/5

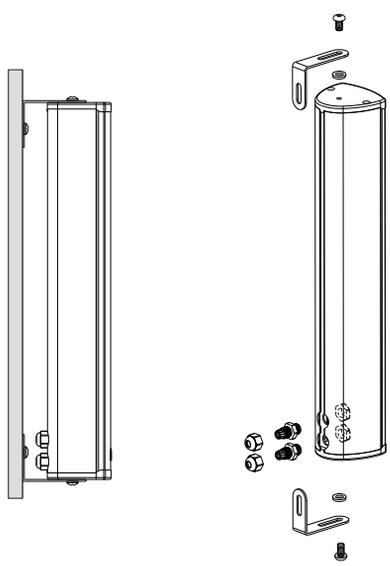

Installation drawing

SCALE:1/8

Wiring diagram

